

User Manual

Introduction

This VIA PCI to USB 2.0 Host Controller card is compliant with the Universal Serial Bus Specification Revision 2.0 and Universal Host Controller Interface Specification for Low-Speed (1.5Mbps) / Full-Speed (12Mbps) speed signaling and Enhanced Host Controller Interface Specification for High-Speed signaling (480Mbps).

Features


- Using VIA (VT6202 / VT6212) PCI to USB 2.0 Host Controller chip
- Compliant with Universal Serial Bus Specification Revision 2.0
- Compliant with Universal Host Controller Interface Specification for USB Rev 1.1
- Compliant with Enhanced Host Controller Interface Specification for USB Rev 0.95
- 32-bit 33MHz Host Interface compliant to PCI Specification release 2.2
- Supports PCI-Bus Power Management Interface Specification release 1.1
- PCI bus-master access
- PCI multi-function device consists of two UHCI Host Controller cores for Full-Speed / Low-Speed signaling and one EHCI Host Controller core for High-Speed signaling.
- All downstream forcing ports can handle High-Speed (480Mbps), Full-Speed (12Mbps), and Low-Speed (1.5Mbps) transaction
- Full support of real time dynamic insertion and removal of devices
- Supports all USB-compliant peripherals (e.g. keyboard, mouse, monitor, telephone, joystick, etc.)
- Driver support for Windows 98SE, ME, 2000, Server 2003, XP & Vista operating system

Installing the VIA PCI to USB 2.0 Host Controller card

Installing the VIA PCI to USB 2.0 Host Controller card into your computer is a simple process. Please follow these steps:

1. Turn off your computer and all external devices connect to it.
2. Disconnect your computer from the power sources.
3. Open the computer case. Refer to your computer user manual for more details.
4. Find an available PCI slot and remove the slot bracket. Save the bracket screw for later use.
5. Align the VIA PCI to USB 2.0 Host Controller card horizontally with respect to the PCI slot and insert it into the slot firmly and evenly. Take care not to force it into the slot. Once you have properly positioned the VIA PCI to USB 2.0 Host Controller card into the slot, fasten it to the computer case with the bracket screw you have saved.
6. Secure the computer case and switch on your computer.

Pin Assignment for Internal USB connectors (If available)

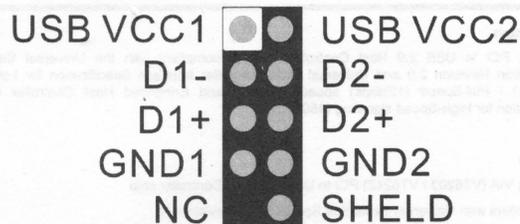

Installing driver for Windows Vista / XP / Server 2003 / 2000

There is already a generic EHCI driver available in Windows 2000, Server 2003, XP, and Vista operating system. Once Windows detects the VIA PCI to USB 2.0 Host Controller card, it will automatically install the generic EHCI driver for you. Just make sure you have updated all the latest Service Packs for your Windows OS through the internet.

To update the latest Service Packs for your Windows OS, simply click **Start** and select **Windows Update**. Follow the on-screen instructions for the upgrade.

Installing Windows ME / 98SE / 98 driver

1. Make sure the VIA PCI to USB 2.0 Host Controller card has been installed properly on your PC.
2. If your card is installed correctly, you will find a yellow exclamation mark next to one of the **VIA Tech 3038 PCI to USB Universal Host Controller item** under **Universal Serial Bus Controllers** in Device Manager.
3. Insert the supplied Driver Installation CD into the CDROM drive.
4. Execute the setup program by double clicking on the **SETUP.EXE** file in **D:\VIA\VT62X2** folder of the Driver Installation CD (Assuming your CDROM drive is Drive D).
5. At the setup program, select **Install USB Driver** and press the **Next** button.
6. Follow the setup program instructions to finish installing the EHCI drivers. Once the drivers are installed, you need to restart your Windows.
7. If you have installed the EHCI drivers correctly, the yellow exclamation mark next to the item in Device Manager described step 2 will be missing and the EHCI driver will be added to **Universal Serial Bus Controllers** in Device Manager.